


DW 311

Inverted roof

Upstand to concrete, render finish



Tel 01925 445532 Fax 01925 575096

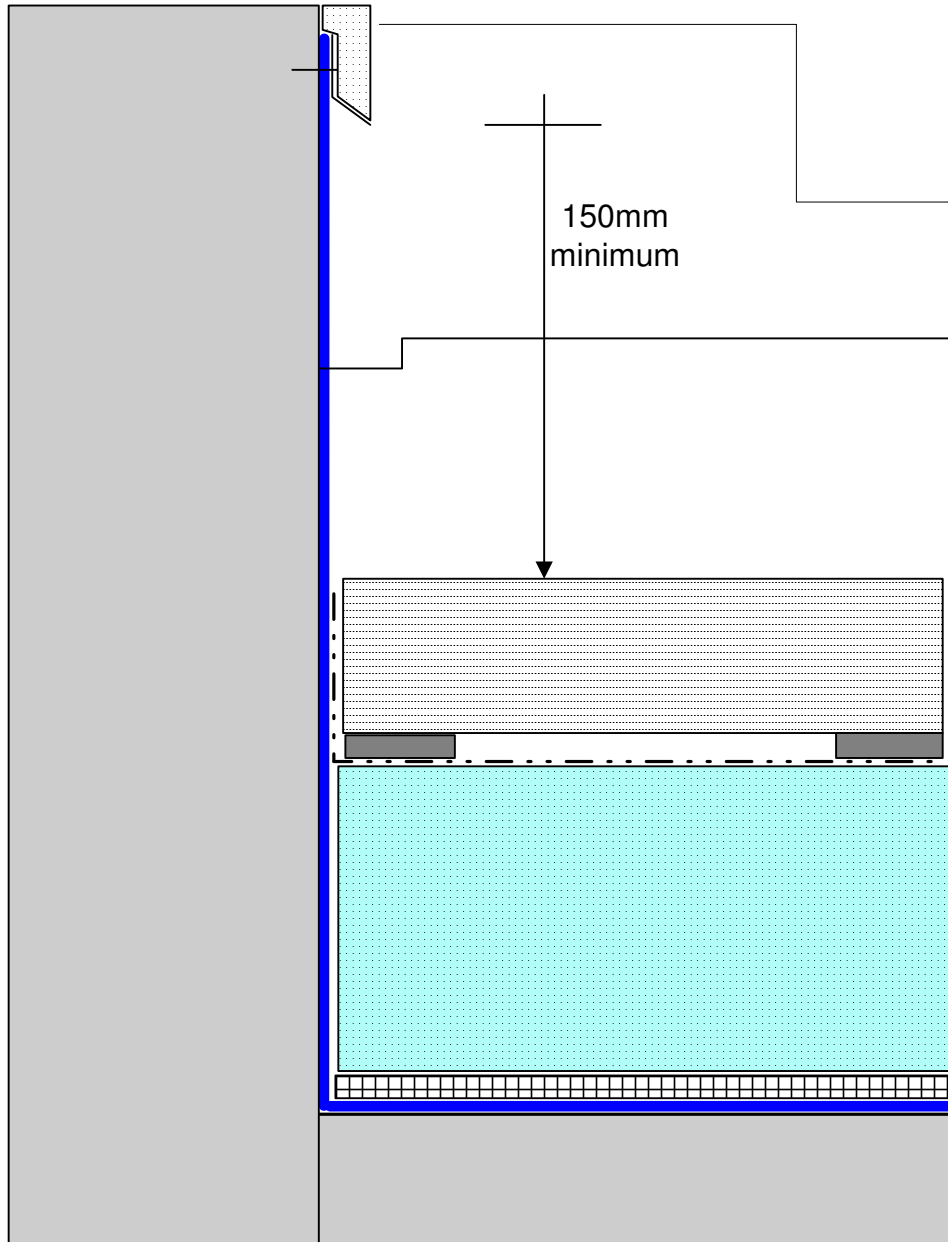

render finish to render stop, fixed through top of membrane

membrane finished to a masked line, fully bonded to concrete upstand

finishes, i.e. paving, decking, etc.

geotextile separation layer

insulation

drainage composite

Kemperol membrane applied to prepared substrate